

367.40127X00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



Applicant(s): Miska HANNUKSELA, et al

Serial No.:

Filed: May 15, 2001

Title: VIDEO CODING

Group:

LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

May 15, 2001


Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, the applicant(s) hereby claim(s) the right of priority based on United Kingdom Patent Application No.(s) 0011606.1 filed May 15, 2000.

A certified copy of said United Kingdom Application is attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP

  
\_\_\_\_\_  
Carl I. Brundidge  
Registration No. 29,621

CIB/nac  
Attachment  
(703) 312-6600

This Page Blank (uspto)



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

01 MAY 2001

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

**This Page Blank (uspto)**



INVESTOR IN PEOPLE

Application No: GB 0011606.1  
Claims searched: 1-11

Examiner: Ms Ceri Witchard  
Date of search: 4 December 2000

## Patents Act 1977 Search Report under Section 17

### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.R): H4F FBB FRP FRG FRW

Int CI (Ed.7): H04N 7/32 7/36

Other: Online: WPI, EPODOC, JAPIO

### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	EP 0702492 A1 NORTHERN TELECOM LIMITED See column 1 line 50 to column 2 line 14.	-
A	US 4972261 GENERAL ELECTRIC See column 1 lines 60-68.	-

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

**This Page Blank (uspto)**

Patents Form 1/77

Patents Act 1977  
(Rule 16)

The  
Patent  
Office

1/7

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE  
A  
15 MAY 2000  
RECEIVED BY FAX

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RE

1. Your reference

PAT 00407 GB

2. Patent application number

(The Patent Office will fill in this part)

0011606.1

15 MAY 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED  
KEILALAHDENTIE 4  
02150 ESPOO  
FINLAND

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention

VIDEO CODING

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

NOKIA IPR DEPARTMENT  
NOKIA HOUSE  
SUMMIT AVENUE  
FARNBOROUGH  
HAMPSHIRE  
GU14ONG UK

Patents ADP number (if you know it)

7577638001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

YES

Patents Form 1/77

Page 03

TO-THE PATENT OFFICE

Form-44 1252 865080

16-May-00 09:42

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

THE PATENT OFFICE A 16 MAY 2000 RECEIVED BY FAX	Description	29
	Claim(s)	3
	Abstract	1
	Drawing(s)	7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (Please specify)

1

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

JULIET HIBBERT

13 05.2000

12. Name and daytime telephone number of person to contact in the United Kingdom


Miss J Hibbert 01252 865101

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



Patents Form 1/77



# VIDEO CODING

This invention relates to video coding.

5

A video sequence consists of a series of still pictures or frames. Video compression methods are based on reducing the redundant and perceptually irrelevant parts of video sequences. The redundancy in video sequences can be categorised into spectral, spatial and temporal redundancy. Spectral  
10 redundancy refers to the similarity between the different colour components of the same picture. Spatial redundancy results from the similarity between neighbouring pixels in a picture. Temporal redundancy exists because objects appearing in a previous image are also likely to appear in the current image. Compression can be achieved by taking advantage of this temporal  
15 redundancy and predicting the current picture from another picture, termed an anchor or reference picture. Further compression is achieved by generating motion compensation data that describes the motion between the current picture and the previous picture.

20

However, sufficient compression cannot usually be achieved by only reducing the inherent redundancy of the sequence. Thus, video encoders also try to reduce the quality of those parts of the video sequence which are subjectively less important. In addition, the redundancy of the encoded bit-stream is reduced by means of efficient lossless coding of compression parameters and  
25 coefficients. The main technique is to use variable length codes.

30

Video compression methods typically differentiate between pictures that utilise temporal redundancy reduction and those that do not. Compressed pictures that do not utilise temporal redundancy reduction methods are usually called  
30 INTRA or I-frames or I-pictures. Temporally predicted images are usually forwardly predicted from a picture occurring before the current picture and are called INTER or P-frames. In the INTER frame case, the predicted motion-

nc29788c.doc

2

compensated picture is rarely precise enough and therefore a spatially compressed prediction error frame is associated with each INTER frame. INTER pictures may contain INTRA-coded areas.

- 5 Many video compression schemes also use temporally bi-directionally predicted frames, which are commonly referred to as B-pictures or B-frames. B-pictures are inserted between anchor picture pairs of I- and/or P-frames and are predicted from either one or both of these anchor pictures. B-pictures normally yield increased compression as compared with forward-predicted
- 10 pictures. B-pictures are not used as anchor pictures, i.e., other pictures are not predicted from them. Therefore they can be discarded (intentionally or unintentionally) without impacting the picture quality of future pictures. Whilst B-pictures may improve compression performance as compared with P-
- 15 pictures, their generation requires greater computational complexity and memory usage, and they introduce additional delays. This may not be a problem for non-real time applications such as video streaming but may cause problems in real-time applications such as video-conferencing.

- 20 A compressed video clip typically consists of a sequence of pictures, which can be roughly categorised into temporally independent INTRA pictures and temporally differentially coded INTER pictures. Since the compression efficiency in INTRA pictures is normally lower than in INTER pictures, INTRA pictures are used sparingly, especially in low bit-rate applications.

- 25 A video sequence may consist of a number of scenes or shots. The picture contents may be remarkably different from one scene to another, and therefore the first picture of a scene is typically INTRA-coded. There are frequent scene changes in television and film material, whereas scene cuts are relatively rare in video conferencing. In addition, INTRA pictures are
- 30 typically inserted to stop temporal propagation of transmission errors in a reconstructed video signal and to provide random access points to a video bit-stream.

INVESTOR IN PEOPLE



P. 039

FAX: +44 1252 865080

Job-143

R-184

P. 39



+44 1252 865080

NMP PATENTS UK



S-MAY. '00 (MON) 18:36

15-05-00 18:25

- Compressed video is easily corrupted by transmission errors, mainly for two reasons. Firstly, due to utilisation of temporal predictive differential coding (INTER frames), an error is propagated both spatially and temporally. In practice this means that, once an error occurs, it is easily visible to the human eye for a relatively long time. Especially susceptible are transmissions at low bit-rates where there are only a few INTRA-coded frames, so temporal error propagation is not stopped for some time. Secondly, the use of variable length codes increases the susceptibility to errors. When a bit error alters the codeword, the decoder will lose codeword synchronisation and also decode subsequent error-free codewords (comprising several bits) incorrectly until the next synchronisation (or start) code. A synchronisation code is a bit pattern which cannot be generated from any legal combination of other codewords and such codes are added to the bit stream at intervals to enable re-synchronisation. In addition, errors occur when data is lost during transmission. For example, in video applications using the unreliable UDP transport protocol in IP networks, network elements may discard parts of the encoded video bit-stream.
- There are many ways for the receiver to address the corruption introduced in the transmission path. In general, on receipt of a signal, transmission errors are first detected and then corrected or concealed by the receiver. Error correction refers to the process of recovering the erroneous data perfectly as if no errors had been introduced in the first place. Error concealment refers to the process of concealing the effects of transmission errors so that they are hardly visible in the reconstructed video sequence. Typically some amount of redundancy is added by the source or transport coding in order to help error detection, correction and concealment.
- There are numerous known concealment algorithms, a review of which is given by Y. Wang and Q. -F. Zhu in "Error Control and Concealment for Video Communication: A Review", Proceedings of the IEEE, Vol. 86, No. 5, May

nc29788c.doc

4

1998, pp. 974 – 997 and an article by P. Salama, N. B. Shroff, and E. J. Delp, "Error Concealment in Encoded Video," submitted to IEEE Journal on Selected Areas in Communications.

- 5 Current video coding standards define a syntax for a self-sufficient video bit-stream. The most popular standards at the time of writing are ITU-T Recommendation H.263, "Video coding for low bit rate communication", February 1998; ISO/IEC 14496-2, "Generic Coding of Audio-Visual Objects. Part 2: Visual", 1999 (known as MPEG-4); and ITU-T Recommendation H.262  
10 (ISO/IEC 13818-2) (known as MPEG-2). These standards define a hierarchy for bit-streams and correspondingly for image sequences and images.

- In H.263, the hierarchy has four layers: picture, picture segment, macroblock, and block layer. The picture layer data contain parameters affecting the whole  
15 picture area and the decoding of the picture data. Most of this data is arranged in a so-called picture header.

- The picture segment layer can either be a group of blocks layer or a slice layer. By default, each picture is divided into groups of blocks. A group of  
20 blocks (GOB) typically comprises 16 successive pixel lines. Data for each GOB consists of an optional GOB header followed by data for macroblocks. If the optional slice structured mode is used, each picture is divided into slices instead of GOBs. A slice contains a number of successive macroblocks in scan-order. Data for each slice consists of a slice header followed by data for  
25 the macroblocks.

- Each GOB or slice is divided into macroblocks. A macroblock relates to 16 x 16 pixels (or 2 x 2 blocks) of luminance and the spatially corresponding 8 x 8 pixels (or block) of chrominance components. A block relates to 8 x 8 pixels  
30 of luminance or chrominance.

INVESTOR IN PEOPLE



P. 041

Job-143

R-184

P. 41

FAX: +44 1252 865080



+44 1252 865080

NMP PATENTS UK

5-MAY '00 (MON) 18:37

15-05-00 18:25



Block layer data consist of uniformly quantised discrete cosine transform coefficients, which are scanned in zigzag order, processed with a run-length encoder and coded with variable length codes. MPEG-2 and MPEG-4 layer hierarchies resemble the one in H.263.

5

By default, these standards use the temporally previous anchor (I, EI, P, or EP) picture as a reference for temporal prediction. This piece of information is not transmitted, i.e. the bit-stream does not contain information relating to the identity of the reference picture. Consequently, decoders have no means to detect if a reference picture is lost. Many transport coders packet video data in such a way that they associate a sequence number with the packets. However, these kinds of sequence numbers are not related to the video bit-stream. For example, a section of a video bit-stream may contain the data for P-picture P1, B-picture B2, P-picture P3, and P-picture P4 captured (and to be displayed) in this order. However, this section of the video bitstream would be compressed, transmitted, and decoded in the following order: P1, P3, B2, P4 since B2 requires both P1 and P3 before it can be encoded or decoded. Let us assume that there is one packet per one picture and each packet contains a sequence number. Let us further assume that the packet carrying B2 is lost.

20 The receiver can detect this loss from the packet sequence numbers. However, the receiver has no means to detect if it has lost a motion compensation reference picture for P4 or if it has lost a B-picture, in which case it could continue decoding normally.

25 The decoder therefore usually sends an INTRA request to the transmitter and freezes the picture on the display. However the transmitter may not be able to respond to this request. For instance in a non-real-time video streaming application, the transmitter cannot respond to an INTRA request from a decoder. Therefore the decoder freezes the picture until the next INTRA

30 frame is received. In a real-time application such as video-conferencing, the transmitter may not be able to respond. For instance, in a multi-party conference, the encoder may not be able to respond to individual requests.

nc29788c.doc

6

Again the decoder freezes the picture until an INTRA frame is output by the transmitter.

- According to a first aspect of the invention there is provided a method of encoding a video signal representing a sequence of pictures, the method comprising receiving a current picture for encoding, forming a temporal prediction of the current picture from a default reference picture for the current picture, comparing the default reference picture with at least one further reference picture, calculating a measure of the similarity between the default reference picture and each further reference picture and, if the measure of similarity meets a pre-determined criterion, outputting an indicator identifying the further reference picture and associating the indicator with the temporal prediction of the current frame.
- The indicator may be termed a spare reference picture number since the indicator indicates to a decoder which reference picture(s) resemble the default reference picture. This "spare" reference picture may be used by a decoder to decode the current frame if the default reference picture is lost for some reason.
- The spare reference picture number may be in respect of the whole picture or part of a picture. In the former case, typically the spare reference picture number is included in a picture header. In the latter case the spare reference picture number is included in the picture segment headers or macroblock headers of the picture. In a preferred implementation of the invention, the video signal is encoded according to the H.263 standard and the indicator is included in the Supplemental Enhancement Information.
- Preferably the method also comprises forming a temporal prediction of the current picture from a first default reference picture and a second default reference picture for the current picture, said first default reference picture occurring temporally before the current picture and said second default

INVESTOR IN PEOPLE




P. 043

FAX: +44 1252 865080

Job-143

R-184

P. 43



NMP PATENTS UK

+44 1252 865080



S-MAY. '00 (MON) 18:38

15-05-00 18:25

reference picture occurring temporally after the current picture, comparing the first default reference picture with at least one further reference picture occurring temporally before the current picture, calculating a measure of the similarity between the first default reference picture and each further  
5 reference picture and, if the measure of similarity meets a pre-determined criterion, outputting an indicator identifying the further reference picture and associating the indicator with the temporal prediction of the current frame.

Thus an indicator is provided for forwardly predicted frames but not for  
10 backwardly predicted frames.

Preferably the default reference picture is compared with a plurality of further reference pictures and an indicator is output for each further reference picture that meets the predetermined criterion. Advantageously the further reference  
15 pictures that meet the predetermined criterion are ranked in order of similarity and the indicator is associated with the temporal prediction of the current frame in order of rank, the further reference picture having the closest similarity to the default reference picture being placed first.

20 According to a second aspect of the invention there is provided a method of decoding an encoded video signal representing a sequence of pictures, the encoded signal including pictures that have been encoded by forming a temporal prediction of a current picture from a default reference picture for the current picture, the method comprising receiving an encoded video signal  
25 representing a current picture, decoding at least the picture header of the current picture, and applying error correction and error concealment methods as appropriate, wherein if the reference picture of the current picture is lost, the decoder examines an indicator identifying a further reference picture and decodes the current picture with reference to said further reference picture if  
30 such an indicator is associated with the current picture

nc29788c.doc

8

According to a third aspect of the invention there is provided a video encoder comprising an input for receiving a video signal representing a sequence of pictures, an input for receiving a current picture for encoding, means for forming a temporal prediction of the current picture from a default reference picture for the current picture, means for comparing the default reference picture with at least one further reference picture, means for calculating a measure of the similarity between the default reference picture and each further reference picture and, when the measure of similarity meets a pre-determined criterion, outputting an indicator identifying the further reference picture and associating the indicator with the temporal prediction of the current frame.

According to a fourth aspect of the invention there is provided a video decoder comprising an input for receiving an encoded video signal representing a sequence of pictures, the encoded signal including pictures that have been encoded by forming a temporal prediction of a current picture from a default reference picture for the current picture, the decoder comprising an input for receiving an encoded video signal representing a current picture, means for decoding at least the picture header of the current picture, and applying error correction and error concealment methods as appropriate, wherein when the reference picture of the current picture is lost, the decoder is arranged to examine an indicator identifying a further reference picture and to decode the current picture with reference to said further reference picture if such an indicator is associated with the current picture

The invention also relates to a radio telecommunications device including an encoder and/or a decoder as described.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a multimedia mobile communications system;

INVESTOR IN PEOPLE



P. 045

FAX: +44 1252 865080

Job-143

R-184

P. 45



NMP PATENTS UK

+44 1252 865080



5-MAY. '00 (MON) 18:38

15-05-00 18:25



Figure 2 shows an example of the multimedia components of a multimedia terminal;

Figure 3 shows an example of a video codec;

Figure 3a shows a more detailed view of a video encoder according to the invention;

Figure 4 illustrates the operation of a first embodiment of a video encoder according to the invention;

Figure 5 illustrates the operation of a second implementation of a video encoder according to the invention;

Figure 6 shows the syntax of a bit stream as known according to H.263;

Figure 7 shows a first example of a bit stream output by an encoder according to the invention;

Figure 8 shows a second example of a bit stream output by an encoder according to the invention;

Figure 9 shows a third example of a bit stream output by an encoder according to the invention;

Figure 10 illustrates enhancement layers used in video coding for SNR scalability; and

Figure 11 illustrates enhancement layers used in video coding for spatial scalability.

Figure 1 shows a typical multimedia mobile communications system. A first multimedia mobile terminal 1 communicates with a second multimedia mobile terminal 2 via a radio link 3 to a mobile communications network 4. Control data is sent between the two terminals 1,2 as well as the multimedia data.

Figure 2 shows the typical multimedia components of a terminal 1. The terminal comprises a video codec 10, an audio codec 20, a data protocol manager 30, a control manager 40, a multiplexer/demultiplexer 50 and a modem 60 (if the required). The video codec 10 receives signals for coding from a video capture device of the terminal (not shown) (e.g. a camera) and receives signals for decoding from a remote terminal 2 for display by the

nc29788c.doc

10

terminal 1 on a display 70. The audio codec 20 receives signals for coding from the microphone (not shown) of the terminal 1 and receive signals for decoding from a remote terminal 2 for reproduction by a speaker (not shown) of the terminal 1. The terminal may be a portable radio communications device, such as a radio telephone.

The control manager 40 controls the operation of the video codec 10, the audio codec 20 and the data protocols manager 30. However, since the invention is concerned with the operation of the video codec 10, no further discussion of the audio codec 20 and protocol manager 30 will be provided.

Figure 3 shows an example of a video codec 10 according to the invention.

The video codec comprises an encoder part 100 and a decoder part 200. The encoder part 100 comprises an input 101 for receiving a video signal from a camera or video source (not shown) of the terminal 1. A switch 102 switches the encoder between an INTRA-mode of coding and an INTER-mode. The encoder part 100 of the video codec 10 comprises a DCT transformer 103, a quantiser 104, an inverse quantiser 108, an inverse DCT transformer 109, an adder 110, a plurality of picture stores 107 (see Figure 3a for more detail), a subtractor 106 for forming a prediction error, a switch 113 and an encoding control manager 105.

The decoder part 200 of the video codec 10 comprises an inverse quantiser 120, an inverse DCT transformer 121, a motion compensator 122, a plurality of picture stores 123 and a controller 124. The controller 124 receives video codec control signals demultiplexed from the encoded multimedia stream by the demultiplexer 50. In practice the controller 105 of the encoder and the controller 124 of the decoder may be the same processor.

30

The operation of an encoder according to the invention will now be described. The video codec 10 receives a video signal to be encoded. The encoder 100

INVESTOR IN PEOPLE



P. 047

Job-143

R-184

P. 47

FAX: +44 1252 865080



NMP PATENTS UK

+44 1252 865080



5-MAY '00 (MON) 18:39

15-05-00 18:25

of the video codec encodes the video signal by performing DCT transformation, quantisation and motion compensation. The encoded video data is then output to the multiplexer 50. The multiplexer 50 multiplexes the video data from the video codec 10 and control data from the control 40 (as well as other signals as appropriate) into a multimedia signal. The terminal 1 outputs this multimedia signal to the receiving terminal 2 via the modem 60 (if required).

In INTRA-mode, the video signal from the input 101 is transformed to DCT coefficients by a DCT transformer 103. The DCT coefficients are then passed to the quantiser 104 that quantises the coefficients. Both the switch 102 and the quantiser 104 are controlled by the encoding control manager 105 of the video codec, which may also receive feedback control from the receiving terminal 2 by means of the control manager 40. A decoded picture is then formed by passing the data output by the quantiser through the inverse quantiser 108 and applying an inverse DCT transform 109 to the inverse-quantised data. The resulting data is added to the contents of the picture store 107 by the adder 110.

In INTER mode, the switch 102 is operated to accept from the subtractor 106 the difference between the signal from the input 101 and a reference picture which is stored in a picture store 107. The difference data output from the subtractor 106 represents the prediction error between the current picture and the reference picture stored in the picture store 107. A motion estimator 111 may generate motion compensation data from the data in the picture store 107 in a conventional manner.

The encoding control manager 105 decides whether to apply INTRA or INTER coding or whether to code the frame at all on the basis of either the output of the subtractor 106 or in response to feedback control data from a receiving decoder. The encoding control manager may decide not to code a received frame at all when the similarity between the current frame and the reference

nc29788c.doc

12

frame is so high or there is not time to code the frame. The encoding control manager operates the switch 102 accordingly.

When not responding to feedback control data, the encoder typically encodes a frame as an INTRA-frame either only at the start of coding (all other frames being P-frames), or at regular periods e.g. every 5s, or when the output of the subtractor exceeds a threshold i.e. when the current picture and that stored in the picture store 107 are judged to be too dissimilar. The encoder may also be programmed to encode frames in a particular regular sequence e.g. I B B P B B P B B P B B I B B P etc.

The video codec outputs the quantised DCT coefficients 112a, the quantising index 112b (i.e. the details of the quantising used), an INTRA/INTER flag 112c to indicate the mode of coding performed (I or P/B), a transmit flag 112d to indicate the number of the frame being coded and the motion vectors 112e for the picture being coded. These are multiplexed together by the multiplexer 50 together with other multimedia signals.

The encoder 100 will be described further with reference to Figure 3a, which shows a simplified view of the encoder 100 of the video codec. The encoder 100 comprises a plurality of picture stores 107a-107g. Although in this example seven picture stores are shown, the number of picture stores may be two or more.

Consider an encoder that is arranged to encode an input signal with the format I B B P B B P B B P B B P B B P B B I etc. For simplicity we will assume that the encoder will encode every frame of the input signal i.e. no frames will be skipped. This is illustrated in Figure 4.

As mentioned earlier, the frames are received from a video capture device in the order 0,1,2,3,4,5,6 etc. and are displayed in this order i.e. the decoded frames are displayed in the order I0,B1,B2,P3,B4,B5,P6 etc. However the

INVESTOR IN PEOPLE



P. 049

Job-143

R-184

P. 49

FAX: +44 1252 865080



NMP PATENTS UK

+44 1252 865080



S-MAY, '00 (MON) 18:40

15-05-00 18:25

video bit stream is compressed, transmitted and decoded in the following order I0, P3, B1, B2, P6, B4, B5 etc. This is because each B-frame requires preceding and succeeding reference frames before it can be encoded/decoded i.e. frame B1 requires frame I0 and P3 to be  
5 encoded/decoded before it can be encoded/decoded.

When the first frame is received, all of the picture stores 107 are empty and the switch 102 is placed into the INTRA mode under control of the encoding controller 105 so that the input signal is encoded in INTRA format. The input  
10 signal is DCT transformed and quantised. This is done on a macroblock by macroblock basis. The resulting signal is then decoded by inverse quantiser 108 and inverse DCT 109. Since the frame is INTRA coded, switch 113 is open. The output of adder 110 is input to the first picture store 107a. For this purpose switch 114a is closed whereas switches 114b-g are open. Thus  
15 frame store 107a holds a decoded version of reference picture I0.

The next picture to be coded is frame 3, which is to be forwardly predicted from I0. Therefore when frame 3 is input at 101, switch 102 is changed to the INTER mode, the output switch 115 of the most recent reference picture store  
20 (i.e. switch 115a) is closed and the motion compensated contents of picture store 107a are subtracted from the input signal, motion compensation data having been calculated in the conventional manner. This prediction error is then encoded by DCT 103 and quantiser 104 and decoded by inverse quantiser 108 and IDCT 109. The switch 113 is then closed, switch 115a  
25 closed and switch 114b closed (the other switches 114 and 115 being open). Thus adder 110 adds the decoded picture to the picture as stored in picture store 107a and stores the result in picture store 107b.

The next frame to be coded is frame 2, which is to be coded as a B-frame.  
30 Thus the contents of both of the frame stores 107a and 107b are made available to the subtractor 106 in a conventional manner. Since B-frames do

nc29788c.doc

14

not form a reference picture for any other frame, the encoded B-frame is not decoded and stored in a reference picture store.

Thus in the case described above, after 19 frames, the frame stores 107a to 107g contain decoded versions of frames I0, P3, P6, P9, P12, P15 and P18 respectively.

In the invention, when the encoder encodes a frame in a predictive manner, the encoding control manager 105 may associate with the frame a Spare Reference Picture Number (SRPN). For example, a SRPN may be associated with the P and B frames of a video signal but not with the I-frames.

Encoders can use this message to instruct decoders which reference picture or pictures resemble the current reference picture, so that one of them can be used as a spare reference picture if the actual reference picture is lost during transmission.

When frame 3 is encoded with reference to frame 0, no other reference frames are stored in the reference picture stores 107a-g. Therefore no SRPN is associated with frame 3. Similarly when frames 1 and 2 are bi-directionally encoded with reference to frames 0 and 3, there are no other frames held in the reference picture stores 107a-g. Therefore no SRPN is associated with either of these frames.

However when frame 6 is forwardly predicted from frame 3 (the decoded version of which is stored in picture store 107b) there is also a copy of frame I0 in picture store 107a. The encoder calculates the similarity between the default reference picture of the current frame (i.e. frame 3 for frame 6) and the contents of the other populated picture stores i.e. picture store 107a. If these two reference pictures are sufficiently similar (e.g. the correlation between the contents of frame store 107a and 107b is above a threshold), the encoder associates a SRPN with the data for frame 6. However, if the similarity is not

INVESTOR IN PEOPLE



P. 051

Job-143

R-184

P. 51

FAX: +44 1252 865080



NMP PATENTS UK



00 (MON) 18:40

+44 1252 865080

5-05-00 18:25

sufficient, no SRPN is associated with frame 6. The SRPN identifies frame 0 as a spare reference picture.

As will be appreciated, when frame 15 is to be encoded (as a P-frame),  
5 decoded versions of frames 0, 3, 6, 9 and 12 are held in picture stores 114a-e respectively. By default, frame 15 is encoded with reference to frame 12 as stored in picture store 107e. The encoder also carries out a calculation of the correlation between the data in the picture store 107e and the data stored in the other populated picture stores 107a-d. The encoder identifies the picture  
10 store (and hence the reference picture) that has the closest correlation with the contents of picture store 107e i.e. with the default reference picture for the current frame being coded. The encoder then adds a SRPN to the encoded data that indicates the identified reference picture. This SRPN can be equal to the Temporal Reference of the reference picture as will be described  
15 below.

More than one SRPN may be associated with a frame. In this case, the SRPN are ordered within the picture header in the order of similarity, the most similar reference picture (other than the default) being mentioned first.

20

The encoding control manager 105 outputs this SRPN codeword on output 112f which indicates the Spare Reference Picture Number associated with the encoded frame. This is multiplexed into the video bitstream by a multiplexer.

25 Figure 4 illustrates the operation of a first embodiment of the encoder. The first line of Figure 4 represents the frames of data received from a capture input device and input to the video coder on input 101. The second line of Figure 4 represents those frames of the input signal that the encoder decides to encode and the coding mode used to encode each frame. As mentioned  
30 above, in this example the encoder is arranged to encode every frame and to use the IBBP coding format.

nc29788c.doc

16

Frame 0 is coded in INTRA-mode; frame 1 is encoded as a B-frame with reference to frame 0 and/or 3; frame 2 is encoded as a B-frame with reference to frame 0 and/or 3; frame 3 is encoded as a P-frame with reference to frame 0; frame 4 is encoded as a B-frame with reference to frame 3 and/or 6; frame 5 is encoded as a B-frame with reference to frame 3 and/or 6; frame 6 is encoded as a P-frame with reference to frame 3; etc.

The third line of Figure 4 shows a SRPN field associated with frames of the encoded signal. In this embodiment a SRPN is associated with the P-frames and B-frames, as shown in the third line of Figure 4. The P-frames and B-frames of the encoded frames are temporally predictively encoded and the I-frames are not.

The fourth line of Figure 4 shows the Temporal Reference (TR) of the encoded frame. This is a field included in H.263 and the value of TR is formed by incrementing its value in the temporally previous reference picture header by one plus the number of skipped or non-reference pictures since the previously transmitted reference picture. Thus in the example shown in Figure 4 the TR shown for each frame is the same as the original temporal order of the frames in the original signal input to 101.

Examples of possible values of SRPN are shown. These values indicate the TR of the spare reference frame as identified by the encoder as described above. Although this example shows only one SRPN for each predictively encoded picture, more than one may be associated with each predictively encoded picture, as described earlier.

Figure 5 illustrates the operation of a second embodiment of an encoder according to the invention. In this embodiment, the encoder is arranged to code the frames according to the regular sequence I B B P B B P B B P B B I B B P B B P. However, in the embodiment, a SRPN is associated with forwardly predicted frames (i.e. P-frames) only.

INVESTOR IN PEOPLE



P. 053

Job-143

R-184

P. 53

FAX: +44 1252 865080



+44 1252 865080

NMP PATENTS UK

5-MAY '00 (MON) 18:41

15-05-00 18:25





The first line of Figure 5 shows the input frames and the second line shows the coded frames and their coding mode, I, P or B.

- 5 The third line of Figure 5 shows the SRPN associated with P-frames. These may be generated as discussed above with reference to Figure 3a.

10 The fourth line of Figure 5 shows the Temporal Reference (TR) of the encoded frame. As in the example shown in Figure 4, the TR shown for each frame is the same as the original temporal order of the frames in the original signal input to 101.

15 Considering the terminal 1 as receiving coded video data from terminal 2, the operation of the video codec 10 will now be described with reference to its decoding role. The terminal 1 receives a multimedia signal from the transmitting terminal 2. The demultiplexer 50 demultiplexes the multimedia signal and passes the video data to the video codec 10 and the control data to the control manager 40. The decoder 200 of the video codec decodes the encoded video data by inverse quantising, inverse DCT transforming and  
20 motion compensating the data. The controller 124 of the decoder checks the integrity of the received data and, if an error is detected, attempts to conceal the error in a manner to be described below. The decoded, corrected and concealed video data is then stored in one of the picture stores 123 and output for reproduction on a display 70 of the receiving terminal 1.

25

Errors in video data may occur at the picture level, the GOB level or the macroblock level. Error checking may be carried out at any or each of these levels.

- 30 Considering first the signal as shown in Figure 4, when a decoder according to the invention receives this signal each frame of the signal is decoded in a conventional manner and then displayed on a display means. The decoded

nc29788c.doc

18

frame may be error corrected and error coded in a conventional manner. Each time a frame is decoded, the decoder examines the TR field to determine when the frame is to be displayed.

5 In the case shown in Figure 4 the decoder receives frame 0 and determines from its picture header that the frame is INTRA-coded. The decoder decodes frame 0 without reference to any other picture and stores it in picture store 123a. The decoder then receives frame 3 and determines from its picture header that the frame is INTER-coded as a P-frame. The decoder therefore  
10 decodes frame 3 with reference to the preceding reference frame 0 and stores it in the next picture store 123b. The decoder then decodes frames 1 and 2 with reference to frames 0 and 3 and so on. These frames are not stored in the picture stores 123 since, as B-pictures, they are not used as a reference frame for any other frame.

15 Let us now assume that the decoder is unable to reconstruct frame 9 (this could be due to the data being greatly corrupted or being lost altogether) and that the next frame received by the decoder is frame 7, with TR=7, and SRPN=0. As frame 9 (one of the default reference picture for frame 7) was  
20 not decoded by the decoder, the decoder looks for a SRPN in the header of the received frame for the backward prediction.

However, frame 7 does not include a SRPN in the backward direction. Therefore the decoder is unable to decode frame 7. This is also the case for  
25 frame 8. The decoder then receives frame 10, which was encoded with reference to frames 9 and 12. Frame 9 was not decoded by the decoder. However frame 10 has SRPN=6. Therefore the decoder uses the decoded reference frame 6, stored in picture store 123c, to decode frame 10 in the forward direction, rather than frame 7. This is also true for frame 11.

30 The next frame to be received is frame 12, which was encoded with reference to picture 9 and has SRPN=6. Since frame 9 was not decoded, the decoder

INVESTOR IN PEOPLE



P. 055

FAX: +44 1252 865080

:5-MAY.00 (MON) 18:42 NMP PATENTS UK

Job-143

R-184

P.55

+44 1252 865080

15-05-00 18:25

uses the reference picture indicated by SRPN (i.e. frame 6 stored in picture store 123c) to decode frame 12.

5 The decoder may detect the omission of a reference frame in a number of ways, for instance information relating to the temporal order of each encoded frame may be examined. Alternatively, the reference frames of an encoded signal may be allocated a number in a sequential order as described in a British patent application filed by the Applicant on even date.

10 If the decoder has the facility to send control feedback data to the transmitting video encoder the decoder can send a request to the transmitting video encoder to encode a frame as an INTRA-frame and so stop the temporal error propagation that would result from frames 10 and 11 being decoded with reference to frame 6. The decoder continues to decode the signal in a  
15 conventional manner.

When the decoder receives frame 21, which is an INTRA frame, the decoder decodes frame 21 without reference to any other frame and stores the decoded frame in picture store 123. The decoder then decodes frames 19  
20 and 20 with reference to frames 18 and 21. Even though some error may have been introduced to frame 18 by decoding frame 12 with reference to frame 6 rather than frame 9, the resulting image should be acceptable and the displayed picture is not held frozen until an INTRA picture is received. This may be more acceptable to a viewer.

25 Considering now the signal as shown in Figure 5, when a decoder according to the invention receives this signal each frame of the signal is decoded in a conventional manner and then displayed on a display means. The decoded frame may be error corrected and error concealed in a conventional manner.  
30 Each time a frame is decoded, the decoder examines the TR field to determine when the frame is to be displayed.

nc29788c.doc

20

The decoder receives frame 0, which is an INTRA frame and decodes it accordingly and stores it in picture store 123a. Let us now assume that the decoder is unable to reconstruct frame 3 (this could be due to the data being greatly corrupted or being lost altogether) and the next frame received and decoded by the decoder is frame 1. Frame 1 is a bi-directional frame encoded with reference to frame 0 and 3. Since frame 3 is lost, the decoder is unable to reconstruct frame 1 and similarly frame 2. The fact that B-frames 1 and 2 have been lost is of no consequence to the decoder as the B-frame does not form a reference picture for any other frame and thus its loss will not introduce any temporal error propagation. The decoder continues to decode the signal in a conventional manner.

The next frame received and decoded by the decoder is frame 6. The decoder knows that the preceding reference picture P3 has been lost (because it could not decode frame 1 or 2). The decoder therefore examines the header of the received frame for an SRPN. The decoder determines that frame 6 has a SRPN=0 and so uses frame 0 in the picture store 123a to decode frame 6.

If the decoder has the facility to send control feedback data to the transmitting video encoder the decoder can send a request to the transmitting video encoder to encode a frame as an INTRA-frame and so stop the temporal error propagation that would result from subsequent frames being decoded with reference to frame 6 which was decode with reference to frame 0 rather than the default frame 3. However the decoder can continue decoding and does not freeze the picture on the display whilst it waits for an INTRA-coded frame.

How the spare reference picture number may be included in the encoded signal will now be addressed with reference to the H.263 video coding standard.

INVESTOR IN PEOPLE



P. 057

Job-143

R-184

P. 57

FAX: +44 1252 865080



+44 1252 865080

NMP PATENTS UK

15-MAY. '00 (MON) 18:42

15-05-00 18:25



Figure 6 shows the syntax of a bit stream as known according to H.263. The following implementations describe the GOB format but it will be clear to a skilled person that the invention may also be implemented in the slice format.

- 5 As mentioned already, the bit stream has four layers: the picture layer, picture segment layer, macroblock layer and block layer. The picture layer comprises a picture header followed by data for the Group of Blocks, eventually followed by any optional end-of-sequence code and stuffing bits.
- 10 The prior art H.263 bit stream is formatted as shown in Figure 6. A descriptor for each part is given below:
- |                 |  |
|-----------------|--|
| PSC             | The picture start code (PSC) indicates the start of the picture  |
| TR              | The Temporal Reference (TR) is formed by incrementing its value in the temporally previous reference picture header by one plus the number of skipped or non-referenced pictures since the previously transmitted one  |
| 15              |  |
| PTYPE           | Amongst other things, PTYPE includes details of the picture coding type i.e. INTRA or INTER  |
| PQUANT          | A codeword that indicates the quantiser to be used for the picture until updated by any subsequent quantiser information   |
| 20              |  |
| CPM             | A codeword that signals the use of optional continuous presence multipoint and video multiplex (CPM) mode  |
| PSBI            | Picture Sub-Bit stream Indicator – only present if CPM is set  |
| TR <sub>B</sub> | Present if the frame is a bi-directionally predicted frame (known as a PB-frame)   |
| 25              |  |
| DBQUANT         | Present if a bi-directional frame  |
| PEI             | This relates to extra insertion information and is set to "1" to indicate the presence of the following optional data fields PSUPP and PEI. PSUPP and PEI are together known as Supplemental Enhancement Information, which is further defined in Annex L of H263. |
| 30              |  |
| GOBS            | Is the data for the group of blocks for the current picture  |

nc29788c.doc

22

ESTF A stuffing codeword provided to attain byte alignment before EOS

EOS A codeword indicating the end of the data sequence for the picture

5 PSTUF A stuffing codeword to allow for byte alignment of the next picture start code PSC

The structure as shown in Figure 6 does not include the optional PLUSTYPE data field. PSBI is only present if indicated by CPM. TRB and DBQUANT are only present if PTYPE indicates use of a so-called PB frame mode (unless the PLUSTYPE field is present and the use of DBQUANT is indicated therein). These issues are addressed in more detail in the H.263 specification.

10 The following paragraphs outline possible implementations of the bit-stream output by an encoder according to the first aspect of the invention.

The spare reference picture number may be incorporated into a H.263 bit stream as follows. Figure 7 shows an example of a bit stream output by an encoder according to the first implementation of the invention. As shown in Figure 7, the bit stream includes a further codeword SRPN which is a codeword indicating the Spare Reference Picture Number. This is inserted by an encoder according to the invention, as described above.

20 Alternatively, the SRPN may be included in the Supplemental Enhancement Information PSUPP (see Annex L of H.263 and Figure 4). The supplemental information may be present in the bit stream even though the decoder may not be capable of providing the enhanced capability to use it, or even to properly interpret it. Simply discarding the supplemental information is allowable by decoders unless a requirement to provide the requested capability has been negotiated by external means.

INVESTOR IN PEOPLE



P. 059

JOB-143

R-184

P. 59

FAX: +44 1252 865080



+44 1252 865080

NMP PATENTS UK

5-MAY '00 (MON) 18:43

15-05-00 18:25



If PEI is set to "1", then 9 bits follow consisting of 8 bits of data (PSUPP) and then another PEI bit to indicate if a further 9 bits follow and so on.

5 The PSUPP data consists of a 4-bit function type indication FTYPE, followed by a 4-bit parameter data size specification DSIZE followed by DSIZE octets of function parameter data, optionally followed by another FTYPE and so on. It is known to use this PSUPP codeword to signal various situations such as: to indicate a full-picture or partial-picture freeze or freeze-release request with or without resizing; to tag particular pictures or sequences of pictures within  
10 the video stream for external use; or to convey chroma key information for video compositing.

To implement the invention using the Supplemental Enhancement Information, a further FTYPE is defined as Spare Reference Picture Number.  
15

Figure 8 illustrates the example where a parameter SRPN is included in the SEI of the picture header. The FTYPE is defined as SRPN. The DSIZE specifies the size of the parameter and the following octet is the parameter data i.e. the value of SRPN. From this value a receiving decoder can  
20 determine whether a reference picture has been lost.

Alternatively, the information may be contained in the additional Supplemental Enhancement Information as specified in a "Draft of new Annex W: Additional Supplementary Enhancement Information Specification" P. Ning and S.  
25 Wenger, ITU-T Study Group 16 Question 15 Document Q15-I-58, November 1999.

In this draft proposal, FTYPE 14 is defined as "Picture Message". When this FTYPE is set, the picture message function indicates the presence of one or  
30 more octets representing message data. The first octet of the message data is a message header with the structure shown in Figure 9 i.e. CONT, EBIT and MTYPE. DSIZE is equal to the number of octets in the message data

nc29788c.doc

24

corresponding to a picture message function, including the first octet message header.

The continuation field CONT, if equal to 1, indicates that the message data associated with the picture message is part of the same logical message as the message data associated with the next picture message function. The End Bit Position field EBIT specifies the number of least significant bits that shall be ignored in the last message octet. Further details of these fields can be found in Annex W.

10

The field MTYPE indicates the type of message. Various types of message are suggested in the draft of Annex W. According to the invention one type e.g. MTYPE 9 is defined as SRPN. The value of SRPN is defined in the octet following the message header.

15

In a specific example, this message contains one data byte, i.e., DSIZE is 2, CONT is 0, and EBIT is 0. The message data bytes contain the Spare Reference Picture Number(s) of the spare reference pictures in preference order (the most preferred appearing first).

20

The above description has made reference to encoded video streams in which bi-directionally predicted pictures (B-pictures) are encoded. As mentioned earlier, B-pictures are never used as reference pictures. Since they can be discarded without impacting the picture quality of future pictures, they provide temporal scalability. Scalability allows for the decoding of a compressed video sequence at more than one quality level. In other words, a scalable multimedia clip can be compressed so that it can be streamed over channels with different data rates and still be decoded and played back in real-time.

30

Thus the video stream may be decoded in different ways by differing decoders. For instance, a decoder can decide only to decode the I- and P-

INVESTOR IN PEOPLE



P. 061

Job-143

R-184

P. 61

FAX: +44 1252 865080



+44 1252 865080

NMP PATENTS UK

S-MAY. '00 (MON) 18:44



15-05-00 18:25



pictures of a signal, if this is the maximum rate of decoding that the decoder can attain. However if a decoder has the capacity, it can also decode the B-pictures and hence increase the picture display rate. Thus the perceived picture quality of the displayed picture will be enhanced over a decoder that only decodes the I- and P-pictures.

Scalable multimedia is typically ordered so that there are hierarchical layers of data. A base layer contains a basic representation of the multimedia clip whereas enhancement layers contain refinement data on top of underlying layers. Consequently, the enhancement layers improve the quality of the clip.

Scalability is a desirable property for heterogeneous and error prone environments. This property is desirable in order to counter limitations such as constraints on bit rate, display resolution, network throughput, and decoder complexity.

Scalability can be used to improve error resilience in a transport system where layered coding is combined with transport prioritisation. The term transport prioritisation here refers to various mechanisms to provide different qualities of service in transport, including unequal error protection, to provide different channels having different error/loss rates. Depending on their nature, data are assigned differently. For example, the base layer may be delivered through a channel with a high degree of error protection, and the enhancement layers may be transmitted through more error-prone channels.

Generally, scalable multimedia coding suffers from a worse compression efficiency than non-scalable coding. In other words, a multimedia clip encoded as a scalable multimedia clip with enhancement layers requires greater bandwidth than if it had been coded as a non-scalable single-layer clip with equal quality. However, exceptions to this general rule exist, for example the temporally scalable B-frames in video compression.

nc29788c.doc

26

The invention may be applied to other scalable video compression systems. For instance, in H.263 Annex O, two other forms of scalability are defined: signal-to-noise (SNR) scalability and spatial scalability.

- 5 Spatial scalability and SNR scalability are closely related, the only difference being the increased spatial resolution provided by spatial scalability. An example of SNR scalable pictures is shown in Figure 10. SNR scalability implies the creation of multi-rate bit streams. It allows for the recovery of coding errors, or differences between an original picture and its reconstruction. This is achieved by using a finer quantiser to encode the difference picture in an enhancement layer. This additional information increases the SNR of the overall reproduced picture.

- 15 Spatial scalability allows for the creation of multi-resolution bit streams to meet varying display requirements and/or constraints. A spatially scalable structure is illustrated in Figure 11. It is essentially the same as in SNR scalability except that a spatial enhancement layer attempts to recover the coding loss between an up-sampled version of the reconstructed reference layer picture and a higher resolution version of the original picture. For example, if the reference layer has a quarter common intermediate format (QCIF) resolution, and the enhancement layer has a common intermediate format (CIF) resolution, the reference layer picture must be scaled accordingly such that the enhancement layer picture can be predicted from it. The QCIF standard allows the resolution to be increased by a factor of two in the vertical direction only, horizontal direction only, or both the vertical and horizontal directions for a single enhancement layer. There can be multiple enhancement layers, each increasing the picture resolution over that of the previous layer. The interpolation filters used to up-sample the reference layer picture are explicitly defined in the H.263 standard. Aside from the up-sampling process from the reference to the enhancement layer, the processing and syntax of a spatially scaled picture are identical to those of an SNR scaled picture.

INVESTOR IN PEOPLE



P. 063

FAX: +44 1252 865080

NMP PATENTS UK

S-MAY, '00 (MON) 18:44

Job-143

R-184

P. 63

+44 1252 865080

15-05-00 18:25

In either SNR or spatial scalability, the enhancement layer pictures are referred to as EI- or EP-pictures. If the enhancement layer picture is upwardly predicted from a picture in the reference layer, then the enhancement layer picture is referred to as an Enhancement-I (EI) picture. In this type of scalability, the reference layer means the layer "below" the current enhancement layer. In some cases, when reference layer pictures are poorly predicted, over-coding of static parts of the picture can occur in the enhancement layer, causing an unnecessarily excessive bit rate. To avoid this problem, forward prediction is permitted in the enhancement layer. A picture that can be predicted in the forward direction from a previous enhancement layer picture or, alternatively, upwardly predicted from the reference layer picture is referred to as an Enhancement-P (EP) picture. Note that computing the average of the upwardly and forwardly predicted pictures can provide bi-directional prediction for EP-pictures. For both EI- and EP-pictures, upward prediction from the reference layer picture implies that no motion vectors are required. In the case of forward prediction for EP-pictures, motion vectors are required.

The SRPN field can be associated with P, PB, Improved PB, and Enhancement Layer (EP) pictures.

However, if Annex N or Annex U is in use and if the picture is associated with multiple reference pictures, the SRPN is not used. For PB and Improved PB pictures, the message typically concerns only the P-part. For EP pictures, the message is used for forward prediction, whereas upward prediction is done from the temporally corresponding reference layer picture. This message preferably is not used if the picture is an I, EI or B picture.

If the encoder is capable of multi-layer coding (for example as discussed in Annex O of H.263) each layer has consecutive Spare Reference Picture Numbers. This may be associated with the enhancement layer number

nc29788c.doc

28

(ELNUM) of the current picture. The Spare Reference Picture Number is incremented by one from the corresponding number of the previous coded reference picture in the same enhancement layer. However, if adjacent pictures in the same enhancement layer have the same temporal reference, and if Annex N or Annex U of H.263 is in use, the decoder preferably regards this occurrence as an indication that redundant copies have been sent of approximately the same pictured scene content, and all of these pictures then share the same SRPN.

- 5 The indicator may also indicate the SRPN for a specified rectangular area of the current picture if at least part of the area is not correctly received. There may be multiple messages for one picture each specifying the SRPN for a non-overlapping rectangular area. If the messages do not cover some areas of the picture, a decoder uses any error concealment for those areas.
- 10 Preferably the decoder uses a concealment method that corresponds to the picture type i.e. for an INTRA picture an INTRA error concealment method is used and for an INTER picture an INTER error concealment method is used.

A specific example will now be given. For each error concealment type message, DSIZE shall be 6, CONT shall be 0, and EBIT shall be 0. If the first data byte is equal to one (0000 0001), this indicates to a decoder that a SRPN is included. If the first data byte is equal to two (0000 0010), this indicates to a decoder that a SRPN is included. The following four PSUPP octets contain the horizontal and vertical location of the upper left corner of the specified rectangle, and the width and height of the rectangle, respectively, using eight bits each and expressed in units of 16 pixels (of luminance picture). For example, an entire QCIF picture is specified by the four parameters (0, 0, 11, 9).

- 25 For picture formats having a width and height that is not divisible by 16, the specified area may extend to the next larger size that would be divisible by 16. For example, an entire image having size of 160 x 120 pixels is specified by

INVESTOR IN PEOPLE



P. 065

FAX: +44 1252 865080

JOB-143

R-184

P. 65



+44 1252 865080

NMP PATENTS UK

15-MAY. '00 (MON) 18:45

15-05-00 18:25



the four parameters (0, 0, 10, 8). Preferably, the specified area does not cross picture boundaries nor overlap with other specified error concealment areas of the same picture.

- 5 The invention may be implemented in other video coding protocols. For example MPEG-4 defines so-called user data, which can contain any binary data and is not necessarily associated with a picture. The additional field may be added to these fields.
- 10 The invention is not intended to be limited to the video coding protocols discussed above: these are intended to be merely exemplary. The invention is applicable to any video coding protocol using temporal prediction. The addition of the information as discussed above allows a receiving decoder to determine the best cause of action if a picture is lost.

15

nc29788c.doc

30

## CLAIMS

1. A method of encoding a video signal representing a sequence of pictures, the method comprising receiving a current picture for encoding,  
5 forming a temporal prediction of the current picture from a default reference picture for the current picture, comparing the default reference picture with at least one further reference picture, calculating a measure of the similarity between the default reference picture and each further reference picture and, if the measure of similarity meets a pre-determined criterion, outputting an  
10 indicator identifying the further reference picture and associating the indicator with the temporal prediction of the current frame.
2. A method according to claim 1 further comprising forming a temporal prediction of the current picture from a first default reference picture and a  
15 second default reference picture for the current picture, said first default reference picture occurring temporally before the current picture and said second default reference picture occurring temporally after the current picture, comparing the first default reference picture with at least one further reference picture occurring temporally before the current picture, calculating a measure  
20 of the similarity between the first default reference picture and each further reference picture and, if the measure of similarity meets a pre-determined criterion, outputting an indicator identifying the further reference picture and associating the indicator with the temporal prediction of the current frame.
- 25 3. A method according to claim 1 or 2 further comprising comparing the default reference picture with a plurality of further reference pictures and outputting an indicator for each further reference picture that meets the predetermined criterion.
- 30 4. A method according to claim 3 further comprising ranking the further reference pictures that meet the predetermined criterion and associating the indicator with the temporal prediction of the current frame in order of rank, the

INVESTOR IN PEOPLE



P. 067

Job-143

FAX: +44 1252 865080

R-184

P. 67



NMP PATENTS UK

+44 1252 865080



5-MAY. '00 (MON) 18:45

15-05-00 18:25

further reference picture having the closest similarity to the default reference picture being placed first.

5. A method according to any preceding claim wherein the indicator is included in a picture header.

6. A method according to any preceding claim wherein the video signal is encoded according to the H.263 video compression standard and the indicator is included in the Supplemental Enhancement Information.

10

7. A method of decoding an encoded video signal representing a sequence of pictures, the encoded signal including pictures that have been encoded by forming a temporal prediction of a current picture from a default reference picture for the current picture, the method comprising receiving an encoded video signal representing a current picture, decoding at least the picture header of the current picture, and applying error correction and error concealment methods as appropriate, wherein if the reference picture of the current picture is lost, the decoder examines an indicator identifying a further reference picture and decodes the current picture with reference to said further reference picture if such an indicator is associated with the current picture

9. A video encoder comprising an input for receiving a video signal representing a sequence of pictures, an input for receiving a current picture for encoding, means for forming a temporal prediction of the current picture from a default reference picture for the current picture, means for comparing the default reference picture with at least one further reference picture, means for calculating a measure of the similarity between the default reference picture and each further reference picture and, when the measure of similarity meets a pre-determined criterion, outputting an indicator identifying the further reference picture and associating the indicator with the temporal prediction of the current frame.

nc29788c.doc

32

10. A video decoder comprising an input for receiving an encoded video signal representing a sequence of pictures, the encoded signal including pictures that have been encoded by forming a temporal prediction of a current picture from a default reference picture for the current picture, the decoder comprising an input for receiving an encoded video signal representing a current picture, means for decoding at least the picture header of the current picture, and applying error correction and error concealment methods as appropriate, wherein when the reference picture of the current picture is lost, the decoder is arranged to examine an indicator identifying a further reference picture and to decode the current picture with reference to said further reference picture if such an indicator is associated with the current picture
11. A radio telecommunications device including an encoder according to claim 9 and/or a decoder according to claim 10.

INVESTOR IN PEOPLE



P. 069

Job-143

FAX: +44 1252 865080

R-184

P. 69



+44 1252 865080

NMP PATENTS UK

5-MAY '00 (MON) 18:46

15-05-00 18:25







## ABSTRACT

*Associating a plurality of similar reference frames*  
~~VIDEO CODING~~ *with a predicted frame.*

- 5 A method of encoding a video signal representing a sequence of pictures, the method comprising receiving a current picture for encoding, forming a temporal prediction of the current picture from a default reference picture for the current picture, comparing the default reference picture with at least one further reference picture, calculating a measure of the similarity between the
- 10 default reference picture and each further reference picture and, if the measure of similarity meets a pre-determined criterion, outputting an indicator identifying the further reference picture and associating the indicator with the temporal prediction of the current frame.

- 15 *Preferably the further reference pictures are ranked with the reference picture having the closest similarity Fig 5 to the default reference picture being placed first.*

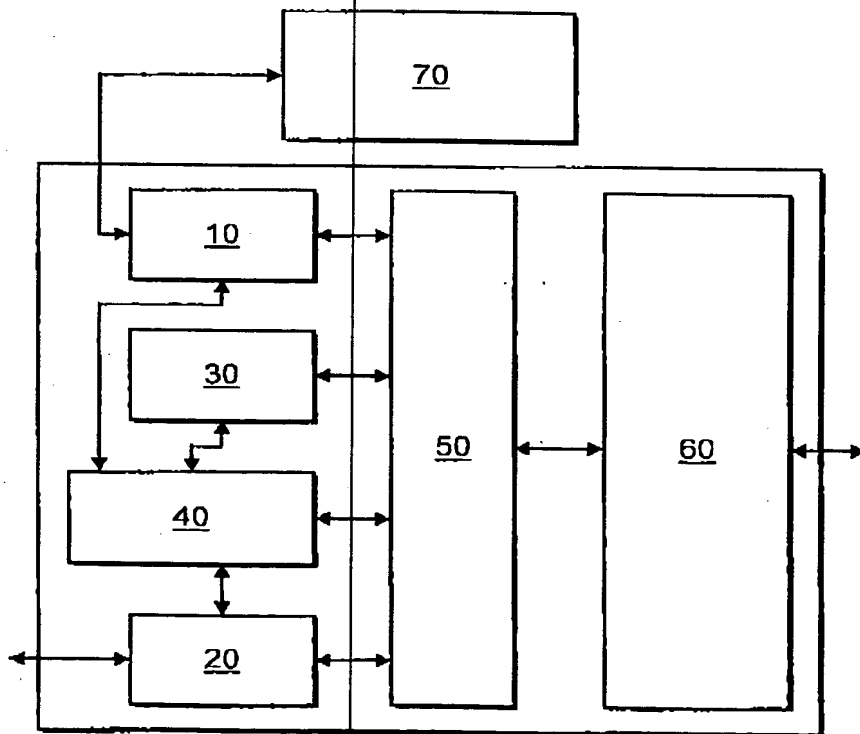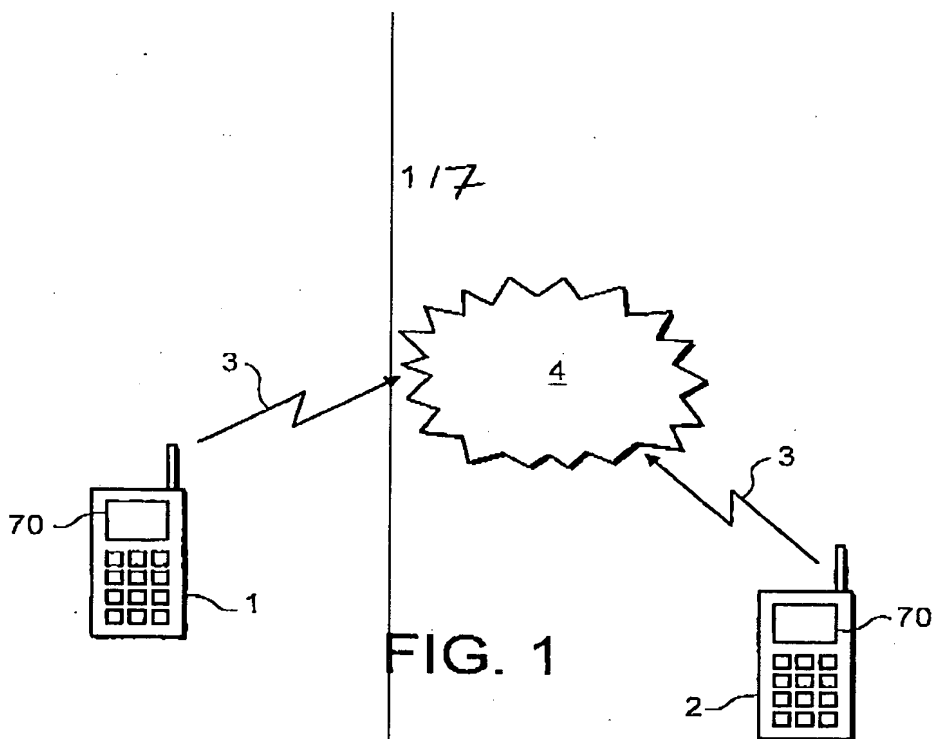

15-MAY.'00 (MON) 18:47

NMP PATENTS UK

15-05-00 18:25 +44 1252 865080



FAX: +44 1252 865080

R-184 P.71

Job-143



INVESTOR IN PEOPLE

P.071

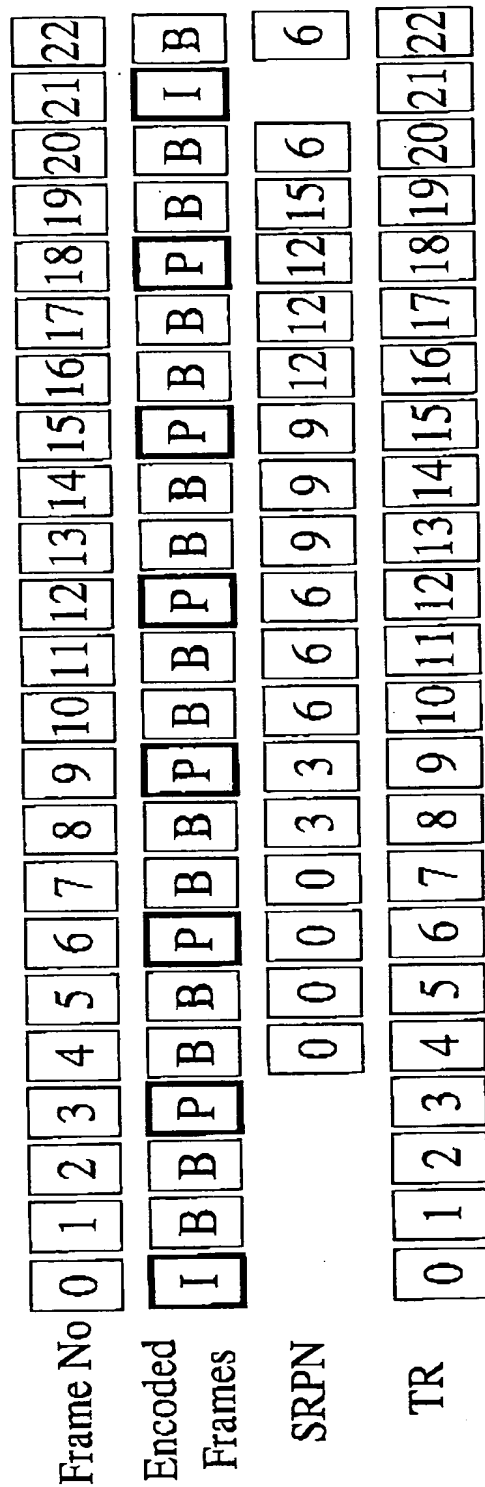


Fig. 4

4/7

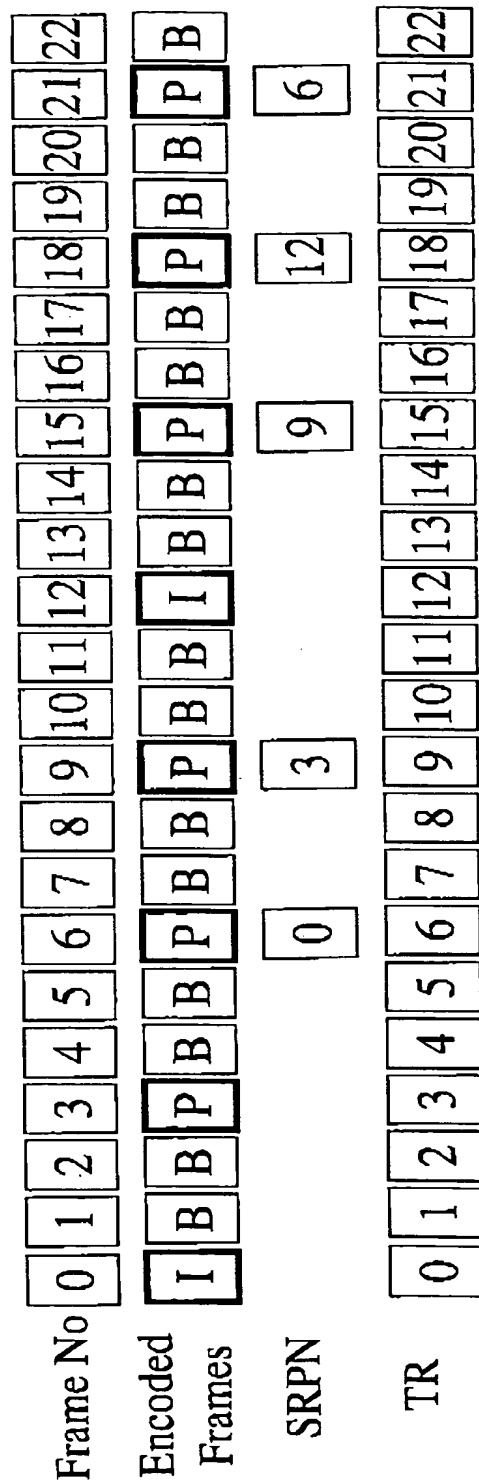


Fig. 5



Fig 6


PSC	TR	PTYPE	PQUANT	CBM	PSBI	TR <sub>g</sub>	DQUANT	PEI	PSUPP	PEI	GOBs	ESTUF	EOS	PSTUF	
-----	----	-------	--------	-----	------	-----------------	--------	-----	-------	-----	------	-------	-----	-------	--

Fig 7

PSC	TR	PTYPE	PQUANT	CBM	PSBI	TR <sub>B</sub>	DQUANT	SRPN	PEI	
-----	----	-------	--------	-----	------	-----------------	--------	------	-----	--


517

Fig 8

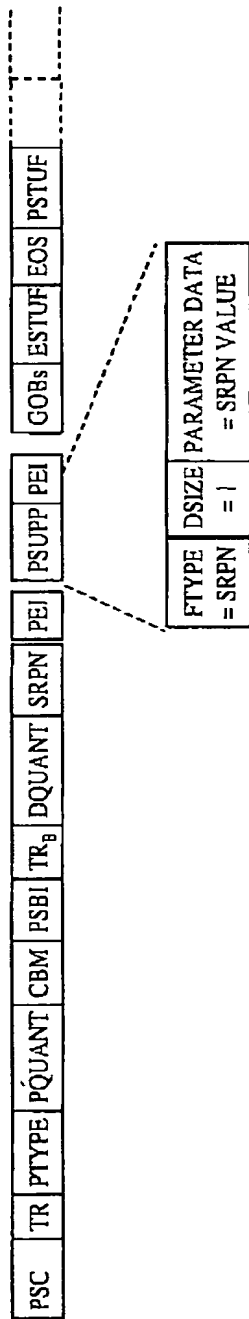

617

Fig. 9

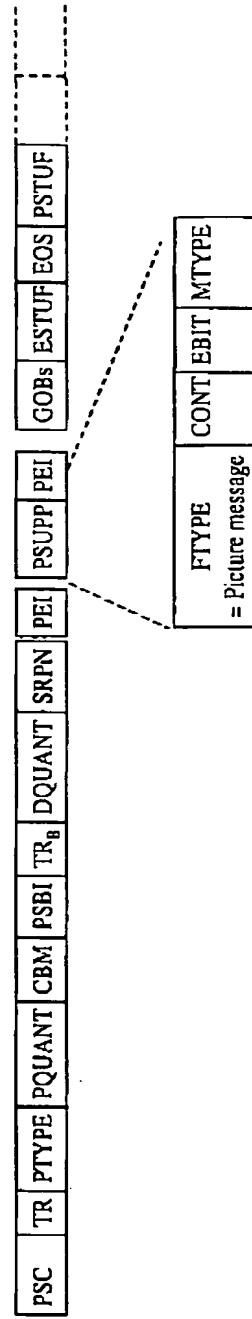

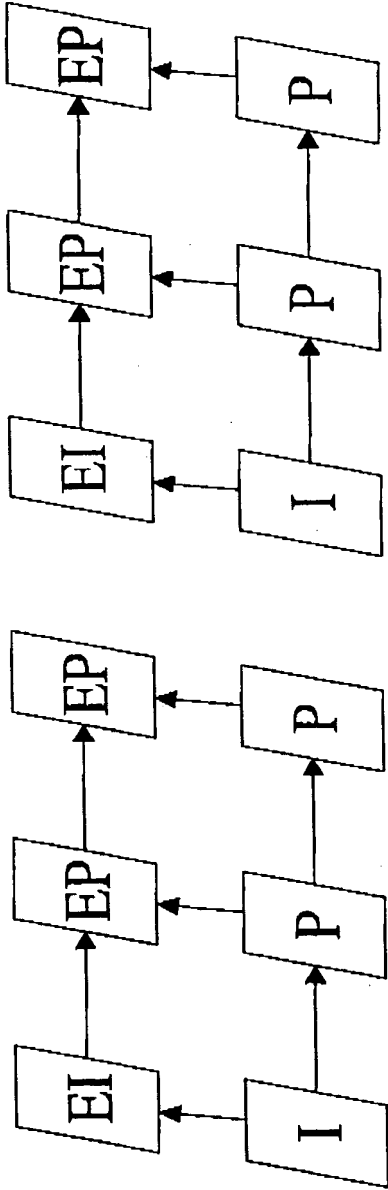


Fig. 10

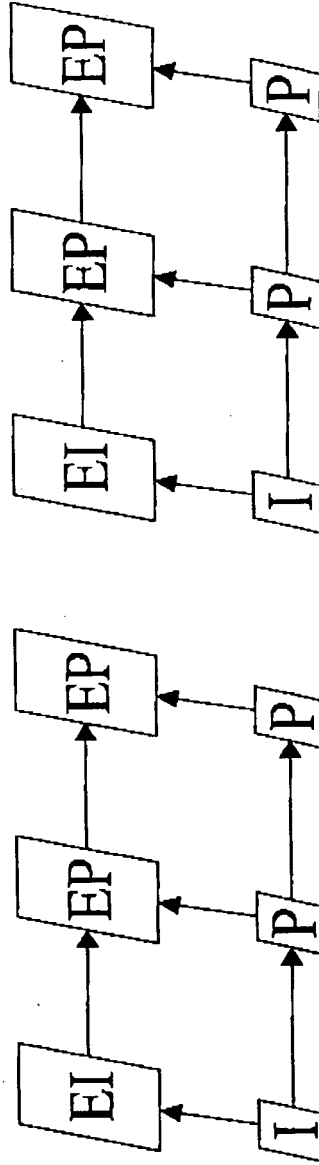


Fig. 11

7/7



5-MAY, '00 (MON) 18:48

15-05-00 18:25

NMP PATENTS UK

+44 1252 865080



FAX: +44 1252 865080

R-184

P-77

Job-143

INVESTOR IN PEOPLE



P. 077